

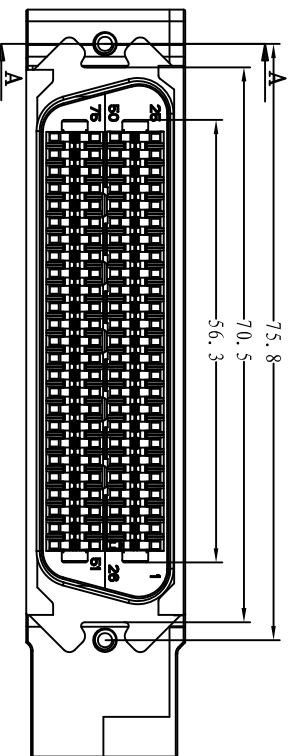
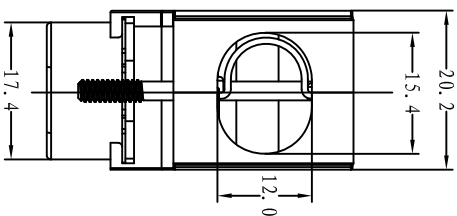


DESCRIPTION


Material & finish
 SHELL:
 steel Zinc plated, Tin ploted
 or Nickel plated steel
 PIN CONTACT:
 Phosphor bronze or brass
 Gold Plated
 INSULATOR:
 PBT & Glass-fibre reinforced
 UL-94-V0
 CURRENT RATING:5Amp
 DIELECTRIC STRENGTH:
 1000V for one minute
 INSULATOR RESISTANCE:
 1000MΩ MIN.(at 500V DC)
 CONTACT RESISTANCE:35mΩ Max. mated
 TEMPERATURE:
 -55°C to +105°C

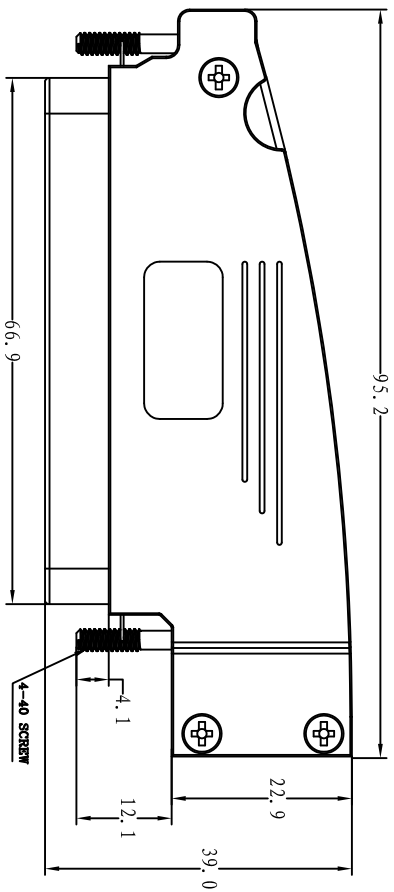

NOTE:

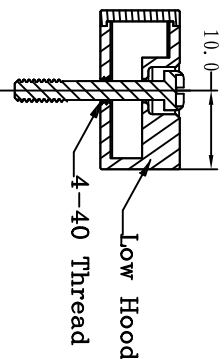

57R1 100 P * * * 0 057

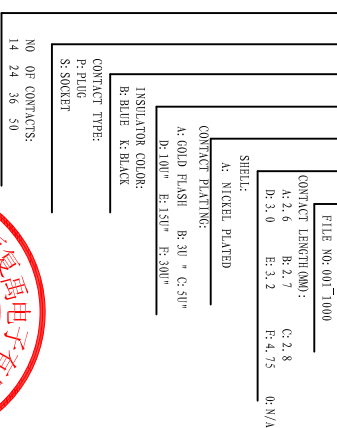

FUYCONN
 东莞市复禹电子有限公司
 DONG GUAN FUYCONN ELECTRONICS CO., LTD

MODEL NAME:

957-100P公头螺丝型

SELECT	DIN/NO	1	2	3	EXTRA
0.00	0.05	0.05	0.10		
0.00	0.10	0.15	0.20		
0.0	0.15	0.25	0.30		
0.	0.25	0.30	0.40		
ANGLE	1.0°	3.0°	5.0°		

PART NO. 57R100P***0057
 APPROVED BY:
 CHECKED BY:
 DRAW BY: Jenny
 FILE NO. FUY57057-2
 SCALE:
 DATE: 2010-07-14

